




RTL laminated fiberglass top mount filter is durable corrosion - resistant , glossy finished in gel coats for a smooth and beautiful exterior , which is popular in the market . This collection of sand filters is the perfect choice for high - end villas and hotel pools , high - class spas and wellness pools , baths , fish ponds & etc.

- Non corrosive gel coat fiberglass tank , smooth finished
- Equipped with a 1.5 " or 2.0 " six - position multiport valve
- Universal standard of union connection provided
- Max . working pressure 36 psi / 2.5 bar
- Max . temperature of 43 ° C (109 ° F)
- Suggested size of media : 0.5-0.8mm

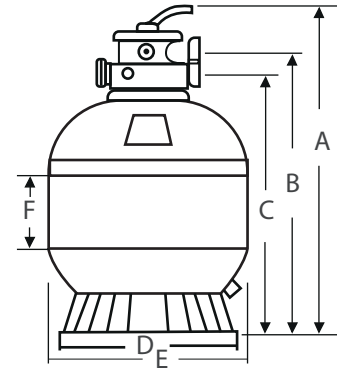

Kodu Code	Maksimum akış hızı Max flow rate		Filtre Alanı Filter area	Liman Boyutu Port size		Kum Sand	Boyutlar Dimensions(mm)					
	Lpm	m ³ / h		mm	inch		A	B	C	D	E	F
MULTIPORT VALVE / Çok YOLLU VANA W 1.5												
RTL 550	167	10.00	0.20	50	"1.5	88	886	750	690	390	530	286
RTL 650	275	16.50	0.33	50	"1.5	158	1000	850	790	500	640	318
MULTIPORT VALVE / Çok YOLLU VANA W 2.0												
RTL 750	366	22.00	0.44	63	"2	260	1170	1005	920	710	750	390
RTL 800	420	25.00	0.50	63	"2	350	1200	1030	950	710	800	420
RTL 900	533	32.00	0.64	63	"2	422	1295	1160	1080	710	900	420