






2900
rpm

- ▶ Totally interchangeable with opt-d. Updated design
- ▶ Self-priming up to 4mwh
- ▶ Suitable for operation with salt chlorinators and sea water
- ▶ Available high efficiency three phase motor class IE3 according to standard IEC 1-30-60034
- ▶ Thermal protector incorporated in single-phase version
- ▶ Insulation Class: F
- ▶ Protection: IP55
- ▶ Motor: 50Hz/2900 rpm. Available also at 60Hz
- ▶ Tmax: 40°C

Characteristics curve

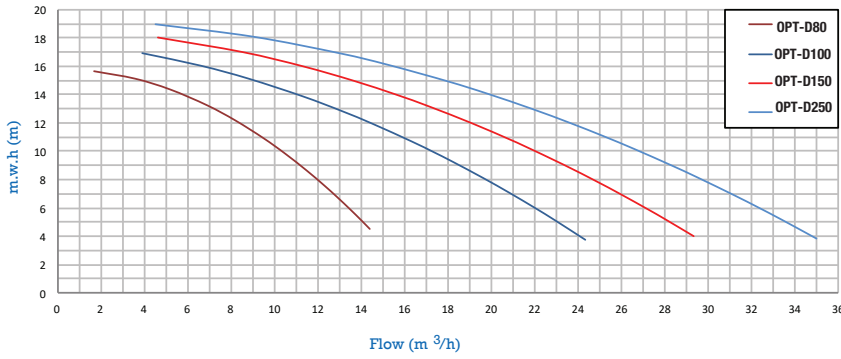

Hydraulic Performance

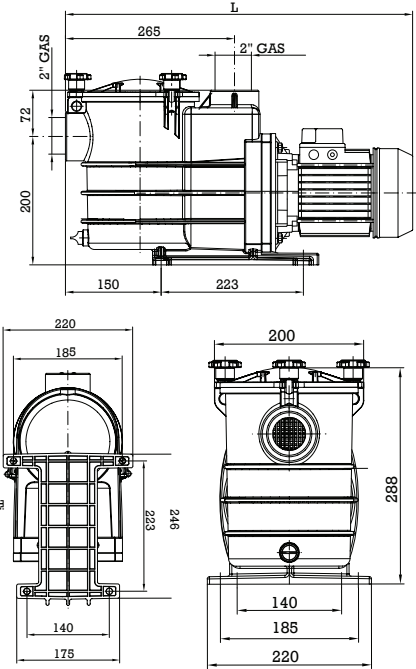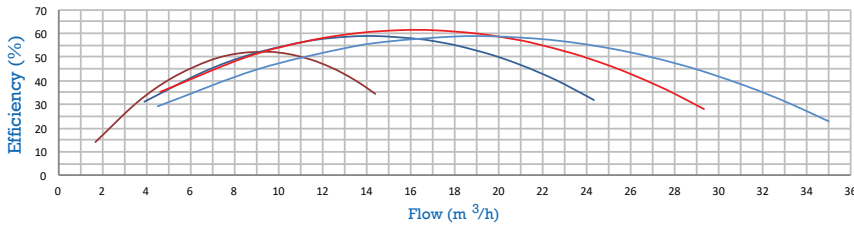

Code Kodu

L

OPT-D80

551

OPT-D100

551

OPT-D150

581

OPT-D250

581

Kodu Code	Güç Power		kapasite Capac. µF				BASMA YÜKSEKLİĞİ / Head (m)								Bağlanti Connections		Ağırlık Weight Kg
	HP	kW		II 230V A	III 230V A	III 400V A	4	6	8	10	12	14	16	18	DN		
				Debi/ Flow rate / (m³/h)								IN	OUT				
OPT-D80	0,8	0,6	16	4,0	2,5	1,6	14,4	13,5	12,3	10,5	8,2	5,2	1,7	-	2"	2"	13,6
OPT-D100	1	0,75	20	4,8	3,0	1,9	24,3	22,0	19,6	17,3	14,5	11,3	6,6	-	2"	2"	13,7
OPT-D150	1,5	1,1	30	6,6	4,2	2,5	29,3	27,2	24,8	22,1	19,1	15,6	11,3	4,6	2"	2"	17,1
OPT-D250	2	1,5	40	8,9	5,6	3,3	35,0	32,3	29,5	26,6	23,6	19,8	15,2	9,0	2"	2"	19,0