



Model:FS-02



Model:FS-03



Model:FS-05



Model:FS-06



Model:FS-07
FS-07G



Model:FS-08
FS-08G



Model:FS-09




Model:FS-10



Model:FS-11

Model	Size L x H x W (cm)	Power kW
FS-02	106 x 87 x 206	3
FS-03	106 x 109 x 206	3
FS-05	110 x 110 x 206	3
FS-06	127 x 86 x 206	3
FS-07	169 x 110 x 206	4
FS-08	128 x 110 x 206	4
FS-09	165 x 88 x 206	3
FS-10	165 x 110 x 206	4
FS-11	147 x 110 x 206	4
FS-07G	173 x 114 x 215	4
FS-08G	132 x 114 x 215	4

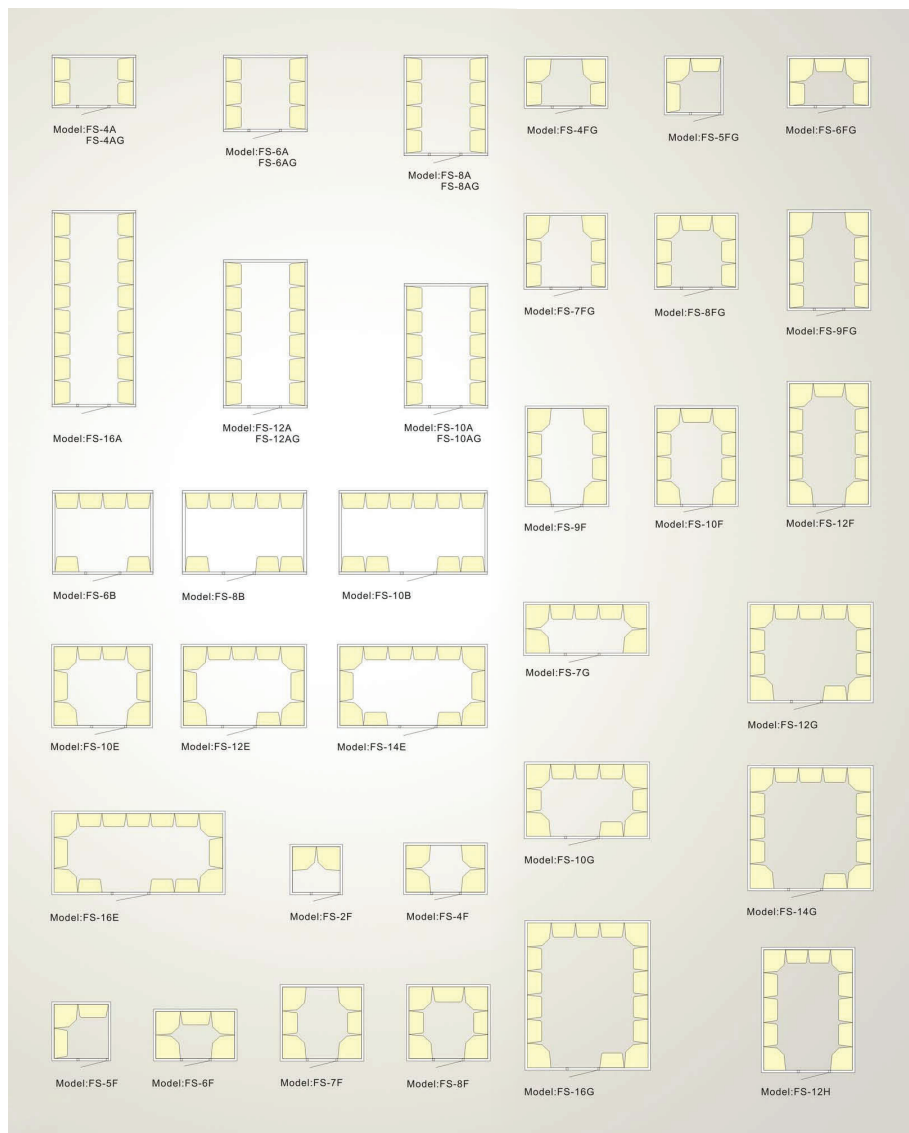

Model	Size L x H x W (cm)	Power kW
FS-4A	210/180 x 132 x 225	6
FS-6A	210/180 x 192 x 225	8
FS-8A	210/180 x 252 x 225	10
FS-10A	210/180 x 312 x 225	12
FS-12A	210/180 x 372 x 225	8 x 2
FS-16A	210 x 493 x 228	10 x 2
FS-6B	252 x 210/180 x 225	12
FS-8B	312 x 210/180 x 225	12
FS-10B	372 x 210/180 x 225	8 x 2
FS-10E	253 x 210 x 225	12
FS-12E	315 x 210 x 225	8 x 2
FS-14E	376 x 210 x 225	8 x 2
FS-16E	435 x 210 x 228	9 x 2
FS-2F	132 x 127 x 225	4
FS-4F	210 x 130 x 225	6
FS-5F	148 x 148 x 225	6
FS-6F	210 x 130 x 225	6

Model	Size L x H x W (cm)	Power kW
FS-7F	210 x 192 x 225	8
FS-8F	210 x 192 x 225	8
FS-9F	210 x 253 x 225	12
FS-10F	210 x 253 x 225	12
FS-12F	210 x 315 x 225	8 x 2
FS-14F	210 x 376 x 225	8 x 2
FS-16F	210 x 438 x 225	9 x 2
FS-7G	215 x 134 x 225	9
FS-10G	315 x 193 x 225	12
FS-12G	315 x 253 x 225	8 x 2
FS-14G	315 x 315 x 225	10 x 2
FS-16G	315 x 376 x 225	12 x 2
FS-20G	315 x 496 x 225	10 x 3
FS-12H	253 x 315 x 225	8 x 2
FS-16H	376 x 315 x 225	12 x 2
FS-18H	438 x 315 x 225	9 x 3


Model	Size L x H x W (cm)	Power kW
FS-4AG	210 x 132 x 215	6
FS-6AG	210 x 192 x 215	8
FS-8AG	210 x 252 x 215	10
FS-10AG	210 x 312 x 215	12
FS-12AG	210 x 372 x 215	8 x 2
FS-4FG	210 x 120 x 215	6
FS-5FG	148 x 148 x 215	6
FS-6FG	210 x 130 x 215	6
FS-7FG	210 x 192 x 215	8
FS-8FG	210 x 192 x 215	8
FS-9FG	210 x 253 x 215	12
FS-10FG	210 x 253 x 215	12
FS-12FG	210 x 315 x 215	8 x 2
FS-14FG	210 x 376 x 215	8 x 2
FS-16FG	210 x 438 x 215	9 x 2



Model: FL-510

Model: FL-518

Model: FL-509

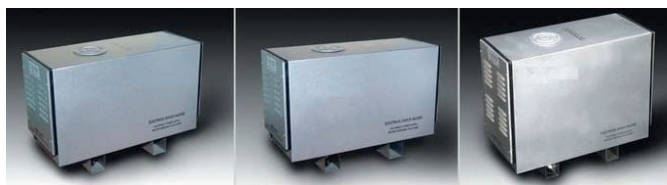

External Digital Control
Adjustable time (12-0 hours) and temperature (58-°45°C).
Generally for commercial steam rooms.



In-built LCD Control
Adjustable time (0-60 minutes) and temperature (58-°45°C).
Generally for home use.



In-built LCD Control
Adjustable time (0-60 minutes) and temperature (58-°45°C).
With MP3 music function.
Generally for home use.

Model	Electric Power Supply			Power kW	Room Volume (m ³)				Dimensions (cm)		
	V	Hz	A		with vent		without vent		L	W	H
FL-3/510	240~220	60/50	13.6	3	min. m ³	max. m ³	min. m ³	max. m ³	48	17	32
FL-4/510	240~220	60/50	18.2	4	2	3	2	4	48	17	32
FL-6/518	240~220 416~380	60/50	27.3	6	2	4	2	5.5	59	22	38
FL-8/518	240~220 416~380	60/50	36.4	8	3	8	4	15	59	22	38
FL-9/509	240~220 416~380	60/50	41	9	3	12	10	20	59	22	38
FL-10/509	240~220 416~380	60/50	45.5	10	6	16	13	24	59	22	48
FL-12/509	240~220 416~380	60/50	54.5	12	10	19	18	27	59	22	48
					14	22	22	30	59	22	48